



# Extreme-Rugged Waterproof Embedded and GPU Computers

Propel AI Applications into Extreme Environments



## Worldwide Office

### Neosys Technology Taipei Headquarter

11F., No. 198, Jian 8th Rd.,  
Zhonghe Dist., New Taipei City 235042, Taiwan  
Tel: +886-2-22236182 Fax: +886-2-22236183  
E-mail: sales@neosys-tech.com

### Neosys Technology America, Inc.

55 East Hintz Rd Wheeling, IL 60090, USA  
Tel: +1-847-656-3298  
E-mail: sales@neosys-tech.com

### Neosys Technology China Co., Ltd.

Room 429, Building 33, Guiping Road 680,  
Shanghai, 200233, China  
Tel: +86-2161155366  
E-mail: sales@neosys.cn

### Neosys Technology Germany GmbH

Am Technologiezentrum 5, 86159 Augsburg, Germany  
Tel: +4982180903967  
E-mail: sales.de@neosys-tech.com

[www.neosys-tech.com](http://www.neosys-tech.com)

[www.neosys-tech.com](http://www.neosys-tech.com)

# Harnessing AI in the Most Challenging Environments

With the popularity of edge AI deployments in recent years, embedded systems deployed at the edge are usually positioned in harsh environments, such as mining trucks, agricultural machinery, military unmanned vehicles, maritime, waste or food production lines. This means that extremely rugged computing systems are required, capable of providing powerful AI computation for data and image processing while operating stably in high or low temperatures, corrosive environments, water-cleaning situations, or in-vehicle conditions.

Neosys' rugged waterproof series computers are designed specifically for these extreme edge AI applications. With ratings from IP66 to IP69K, these computers feature powerful processing capabilities with advanced thermal management. Enclosed in a reinforced stainless-steel chassis, its M12 connectors can ensure uninterrupted operation in extreme temperatures ranging from -40°C to 70°C.

## Evolution Through Innovation



**Waterproof & Dustproof**

Featuring corrosion-proof stainless steel and aluminum chassis, our computers are built air-tight to withstand moisture, salinity, and other environmental contaminants.



**Rugged Designs**

Supporting -40°C to 70°C wide-temperature operation and complies with stringent MIL-STD-810H shock and vibration standards to ensure reliable operation.



**x86/ NVIDIA® Jetson™ Support**

Powered by Intel processors or NVIDIA® Jetson™ modules, the systems deliver high-performance AI computation for diverse customer needs.



**MIL-STD-461G/ 1275D Compliance**

Tested for electromagnetic compatibility (CE102, RE102, RS103) and vehicle power stability, ensuring dependable performance in ground and in-vehicle defense systems.



**In-Vehicle Deployments**

Equipped with 8V to 48V DC input with built-in ignition power control, RS-232/ 485, CAN bus and mini-PCIe for wireless communication expansion.

# Extreme-Rugged Waterproof Embedded and GPU Computers

Neusys waterproof computers are available from IP66 up to IP69K ratings. From AWP series with waterproof functionality, to the rugged SEMIL series, boasting extreme-rugged grade durability. Powered by NVIDIA® Jetson™ system-on-module, Intel processor, or Intel® processor coupled with NVIDIA® GPU, we offer a variety of configurations to meet your needs.

x86-based

NVIDIA® Jetson™ based

## IP69K



### Half-Rack Rugged Computer

SEMIL-2000/ SEMIL-2200

- Intel® 14th/13th-Gen Core™
- 2x 10GbE, 1x GbE, 4x 2.5GbE with PoE+ ports
- MIL-STD-461G, MIL-STD-1275D compliant (SEMIL-2200)



### 19" Rack Mount GPU Computer

SEMIL-2000GC/ SEMIL-2200GC

- Intel® 14th/13th -Gen Core™
- 2x 10GbE, 1x GbE, 4x 2.5GbE with PoE+ ports
- MIL-STD-461G, MIL-STD-1275D compliant (SEMIL-2200GC)

## IP67



### Half-Rack Rugged Computer

SEMIL-1700

- Intel® 9th/8th-Gen Core™
- 8x PoE+ GbE ports



### 19" Rack Mount GPU Computer

SEMIL-1700GC

- Intel® 9th/8th-Gen Core™
- 8x PoE+ GbE ports

## IP66



### Ultra-Compact Computer

POC-465AWP

- Intel® Elkhart Lake Atom® x6425E
- 2x 2.5GbE, Isolated COM ports



### Rugged Computer

Nuvo-9650AWP

- Intel® 14th/13th-Gen Core™
- 3x 2.5GbE, 1x GbE with PoE+ ports



### Low-Profile AI Computer

NRU-161V-AWP/ NRU-162S-AWP

- NVIDIA® Jetson Orin™ NX/ Orin™ Nano
- 6x GMSL2, 4x PoE+ GbE ports



### 10.1" AI Panel PC

NRU-171V-PPC/ NRU-172S-PPC

- NVIDIA® Jetson Orin™ NX/ Orin™ Nano
- 6x GMSL2, 4x PoE+ GbE ports



### Rugged AI Computer

NRU-230V-AWP/ NRU-240S-AWP

- NVIDIA® Jetson AGX Orin™ / NVIDIA® Jetson AGX Orin™ Industrial
- 8x GMSL2, 1x 10GbE, 4x PoE+ GbE ports

Military/ Defense

Mining/ Construction/ Forestry

Agriculture/ Husbandry

Seaport/ Maritime

Food/ Beverage

Extreme-Rugged

Cost-Effective

# Autonomous Mining Truck & Remote Monitoring



The application of edge AI technology allows for autonomous mining vehicles and its effects are threefold: **(1) Safety**, removing human error from the equation; **(2) Operation cost reduction**, capable of fleet management and predictive maintenance, avoiding unexpected failures and downtime; and **(3) Increase efficiency** by introducing autonomous machines that can work 24/7 without fatiguing.

## Requirements



IP rating dust, dirt, moisture, vibrations fluctuations



Operate in 50°C plus temperature environments




Real-time data processing power



CAN bus and wireless modules for communication

## Solution

The computer on the truck must be durable in harsh environments, offer reliable performance, capable of real-time data processing, offer robust connectivity, and provide safety and efficiency through predictive maintenance. By supporting versatile interfaces for cameras, LiDAR, sensors, Radar, GPS network, and CAN bus, the computer ensures seamless communication and remote control functions.

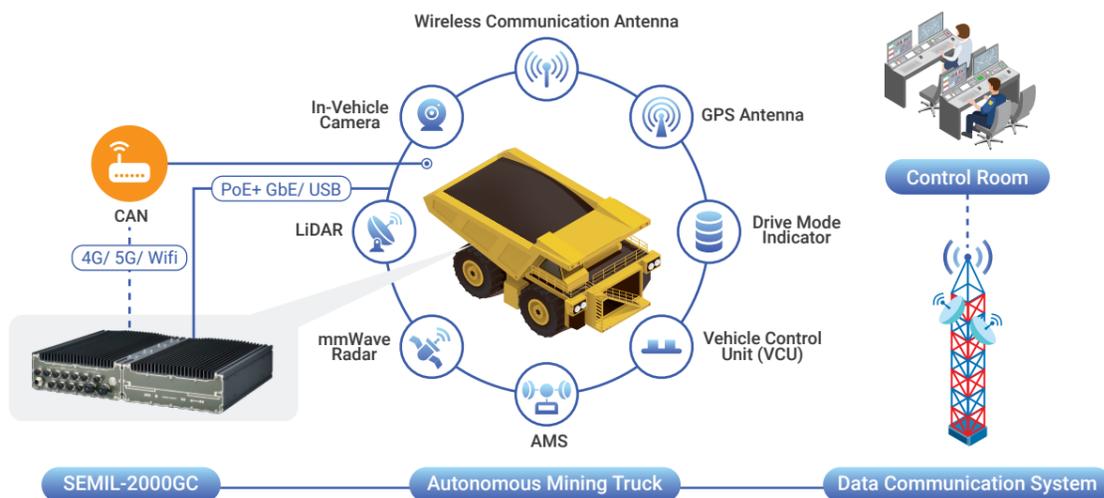

# Automation & Autonomous Agriculture Tractor



Farming has greatly improved with the development of heavy equipment, enabling farmers to cover more area and work more efficiently. However, this means **(1) The need for skilled farmworkers** for agricultural knowledge and operate heavy equipment; **(2) Pay attention to farmworker safety** as approximately 33% of farmworkers suffer non-fatal injuries every year; **(3) Lower costs** such as labor, seeds, soil, and **increase productivity** with automated machinery, which holds the most potential for overall productivity gain.

## Requirements



Deploy in dusty fields, in rain, or hot sunny days



Withstand shock/ vibration conditions in the vehicle



Sufficient camera ports for surround view on a tractor



Robust I/O connectors

## Solution

The computer can offer constant connectivity, data collection and durable performance, providing a 360° view of the tractor's surroundings, location, speed and status. It can also provide fleet management, predictive maintenance, remote control, real-time monitoring, and seamless communication. By integrating into an existing farm management system, it can further enhances these capabilities, optimizing operations and improving productivity in agricultural settings.



## Product Selection



**SEMIL-2000GC Series**  
**IP69K Waterproof GPU Computer**  
 • Intel® 14th/13th-Gen Core™ CPU & NVIDIA® L4 GPU  
 • 2x 10GbE, 1x GbE, 4x 2.5GbE PoE+ via M12 connectors



**SEMIL-1700GC Series**  
**IP67 Waterproof GPU Computer**  
 • NVIDIA® RTX™ 2000 Ada/ L4 GPU  
 • Up to 8x PoE+ GbE ports via M12 connectors



**NRU-230V-AWP**  
**IP66 Waterproof Jetson Computer**  
 • NVIDIA® Jetson AGX Orin™  
 • 8x GMSL2, 4x PoE+ GbE, 1x 10GbE ports



**SEMIL-2000 Series**  
**19"/2 Rack Mount IP69K Waterproof Computer**  
 • Intel® 14th/13th-Gen Core™ CPU  
 • -40°C to 70°C fanless operation



**NRU-161V-AWP**  
**IP66 Waterproof Jetson Computer**  
 • NVIDIA® Jetson Orin™ NX/ Nano  
 • 6x GMSL2, 1x CAN FD, 1x RS232 ports



**NRU-171V-PPC**  
**IP66 10.1" Waterproof Jetson AI Panel PC**  
 • NVIDIA® Jetson Orin™ NX/ Nano  
 • 6x GMSL2, 1x CAN FD, 1x RS232 ports

# Unmanned Ground Vehicle



The integration of AI is bringing autonomy to defense applications, particularly in unmanned machines and robots. One of them is unmanned ground vehicles (UGVs) that can function with little to no human intervention in the battlefield or hazardous zone. The objectives are to (1) **Undertake multi-purpose tasks**, such as information gathering, load-carrying or terrain reconnaissance; (2) **Enhance performance and efficiency** with autonomy functions, and (3) **Ensure the safety of soldiers**, minimizing the need for deployment into hazardous zones.

## Requirements



AI processing for vehicle autonomy



Operate in extreme conditions




Wide-range DC input for vehicle deployment



Optimized SWaP (Size, weight and power)

## Solution

The rugged computer integrates environmental sensors and IP cameras connected via PoE ports to collect data and imagery around the vehicle. The GPU enables object detection with AI inference computation, while the CPU handles route planning, achieving autonomy for the UGV. The computer is IP-rated waterproof and MIL-STD certified for extreme environment deployments.

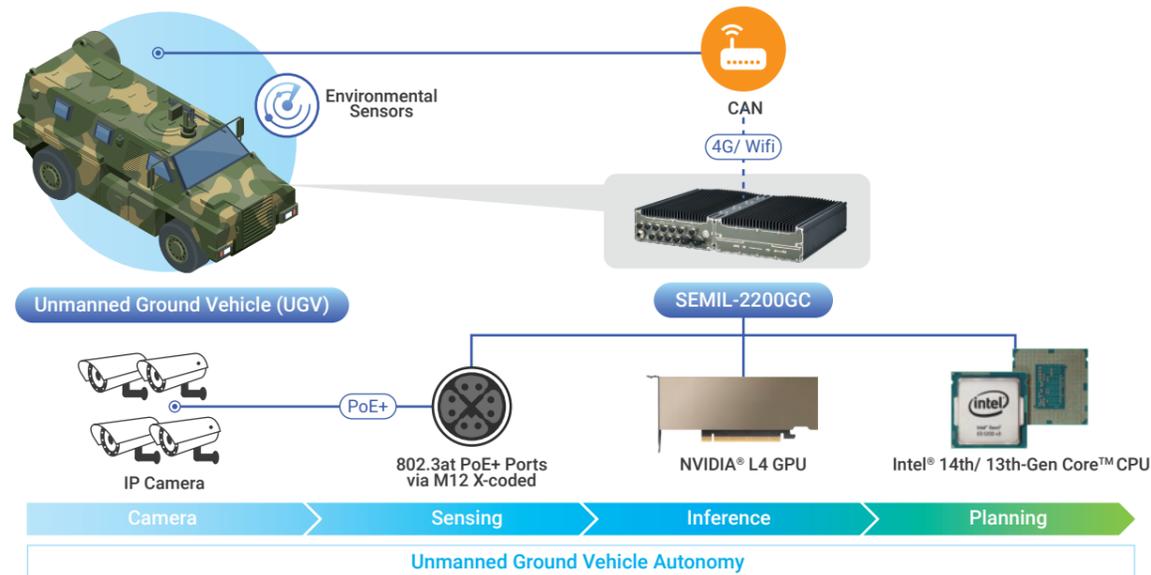

## Product Selection



### SEMIL-2200GC

Mission Critical GPU Computer

- Intel® 14th/ 13th-Gen Core™ CPU & NVIDIA® L4 GPU
- MIL-STD-461G, MIL-STD-1275D, MIL-STD-810H compliant



### NRU-240S-AWP

IP66 Waterproof Jetson Computer

- NVIDIA® Jetson AGX Orin™
- 4x PoE+ GbE, 1x 10GbE via M12 connectors



### POC-465AWP

IP66 Waterproof Compact Computer

- Intel® Elkhart Lake Atom® x6425E CPU
- 2x 2.5GbE, USB2.0 ports via M12 connectors



### NRU-172S-PPC

IP66 10.1" Waterproof Jetson AI Panel PC

- NVIDIA® Jetson Orin™ NX/ Nano
- 4x PoE+ GbE via M12 connectors



### NRU-162S-AWP

IP66 Waterproof Jetson Computer

- NVIDIA® Jetson Orin™ NX/ Nano
- 4x PoE+ GbE via M12 connectors



### Nuvo-9650AWP

Affordable IP66 Waterproof Computer

- Intel® 14th/13th-Gen Core™ CPU
- 3x 2.5GbE, 1x GbE with PoE+ via M12 connectors

# Food Processing Production Line



AI automation is transforming food and waste processing by (1) **Improving efficiency and quality control** while providing (2) **Predictive maintenance and process optimization**. Offering reliable operation in harsh, wet environments, waterproof computers can withstand spills, cleaning, and high humidity, hence reducing downtime and maintenance costs. Most importantly, by enhancing process automation, data accuracy, and compliance with hygiene standards, they also help improve (3) **Product food safety**, making them an indispensable tool for modern food manufacturing.

## Requirements



Water and corrosion resistance



Hygiene and cleanability



Real-time AI processing for inspection



24/7 operation on the production line

## Solution

The AI-powered waterproof computers offer IP66-rated protection, corrosion-resistant housings, wide temperature tolerance, and shock resistance. Equipped with AI and powerful processors, the computer can enable image recognition and machine learning to inspect products on the production line. They enhance real-time quality control and process optimization while ensuring 24/7 reliability in food or waste processing environments.



## Product Selection



### NRU-172S-PPC

IP66 10.1" Waterproof Jetson AI Panel PC

- NVIDIA® Jetson Orin™ NX/ Nano
- 4x PoE+ GbE via M12 connectors



### NRU-162S-AWP

IP66 Waterproof Jetson Computer

- NVIDIA® Jetson Orin™ NX/ Nano
- 4x PoE+ GbE via M12 connectors



### Nuvo-9650AWP

Affordable IP66 Waterproof Computer

- Intel® 14th/13th-Gen Core™ CPU
- 3x 2.5GbE, 1x GbE with PoE+ via M12 connectors

# Extreme-Rugged Waterproof Embedded Computers



Model Name	SEMIL-2047GC/ SEMIL-2247GC	SEMIL-2007/ SEMIL-2207	SEMIL-1748GC	SEMIL-1704		
<b>Chassis</b>	<b>Dimensions (W x D x H)</b>	440 x 310 x 90.5 mm	220 x 310 x 90.5 mm	440 x 310 x 90.5 mm	220 x 310 x 90.5 mm	
	<b>Weight</b>	12 kg (SEMIL-2047GC) 12.2 kg (SEMIL-2247GC)	6 kg (SEMIL-2007) 6.2 kg (SEMIL-2207)	12.2 kg	5.8 kg	
	<b>Chassis Construction</b>	Aluminum alloy with stainless steel/ waterproof	Aluminum alloy with stainless steel/ waterproof	Aluminum alloy with stainless steel/ waterproof	Aluminum alloy with stainless steel	
	<b>IP Rating</b>	IP69K	IP69K	IP67	IP67	
<b>System</b>	<b>Processor</b>	Intel® 14th-Gen Core™ CPU Intel® 13th-Gen Core™ CPU Intel® 12th-Gen Core™, Pentium®, Celeron® CPU	Intel® 14th-Gen Core™ CPU Intel® 13th-Gen Core™ CPU Intel® 12th-Gen Core™, Pentium®, Celeron® CPU	Intel® Xeon® E-2176G/ E-2278GE/ E-2278GEL Intel® Core™ i7-9700E/ i7-9700TE/ i7-8700/ i7-8700T Intel® Core™ i5-9500E/ i5-9500TE/ i5-8500/ i5-8500T Intel® Core™ i3-9100E/ i3-9100TE/ i3-8100/ i3-8100T	Intel® Xeon® E-2176G/ E-2278GE/ E-2278GEL Intel® Core™ i7-9700E/ i7-9700TE/ i7-8700/ i7-8700T Intel® Core™ i5-9500E/ i5-9500TE/ i5-8500/ i5-8500T Intel® Core™ i3-9100E/ i3-9100TE/ i3-8100/ i3-8100T	
	<b>Acceleration GPU</b>	NVIDIA® L4	-	NVIDIA® L4	-	
	<b>Chipset</b>	Intel® Q670E (SEMIL-2047GC) Intel® R680E (SEMIL-2247GC)	Intel® Q670E (SEMIL-2007) Intel® R680E (SEMIL-2207)	Intel® C246	Intel® C246	
	<b>Graphics</b>	Intel® UHD Graphics 770	Intel® UHD Graphics 770	Intel® UHD Graphics 630	Intel® UHD Graphics 630	
<b>I/O Interface</b>	<b>Memory</b>	Up to 64 GB DDR5 4800	Up to 64 GB DDR5 4800	Up to 64 GB DDR4-2666/ 2400	Up to 64 GB DDR4-2666/ 2400	
	<b>Ethernet</b>	4x 2.5GbE IEEE 802.3at (25.5W) by Intel® I226-IT (M12 X-coded) 1x GbE by Intel® I219-LM (M12 X-coded)	4x 2.5GbE IEEE 802.3at (25.5W) by Intel® I226-IT (M12 X-coded) 1x GbE by Intel® I219-LM (M12 X-coded)	1x IEEE 802.3at (25.5W) by Intel® I219 (M12 X-coded) 7x IEEE 802.3at (25.5W) by Intel® I210 (M12 X-coded)	1x IEEE 802.3at (25.5W) by Intel® I219 (M12 X-coded) 3x IEEE 802.3at (25.5W) by Intel® I210 (M12 X-coded)	
	<b>10GbE Port</b>	2x 10GbE by X550-AT2 (M12 X-coded)	2x 10GbE by X550-AT2 (M12 X-coded)	Optional 1x 10G port (M12 X-coded)	Optional 1x 10G port (M12 X-coded)	
	<b>CAN bus</b>	2x isolated CAN bus 2.0 port	2x isolated CAN bus 2.0 port	-	-	
	<b>Video Port</b>	2x Type-C USB supporting DP	2x Type-C USB supporting DP	1x VGA (M12 A-coded)	1x VGA (M12 A-coded)	
	<b>Serial Port</b>	2x 3-wire RS-232 ports 1x 3-wire RS-232 ports 1x RS-422/485	2x 3-wire RS-232 ports 1x 3-wire RS-232 ports 1x RS-422/485	2x RS-232 ports (M12 A-coded)	2x RS-232 ports (M12 A-coded)	
	<b>USB 2.0</b>	2x USB 2.0 (M12 A-coded)	2x USB 2.0 (M12 A-coded)	4x USB 2.0 (M12 A-coded) 1x USB 2.0 (internal)	2x USB 2.0 (M12 A-coded) 1x USB 2.0 (internal)	
	<b>USB 3.2/ USB 3.1</b>	2x Type-C USB 3.2 Gen1	2x Type-C USB 3.2 Gen1	-	-	
	<b>Audio</b>	-	-	1x mic-in and speaker-out (M12 A-coded)	-	
	<b>Digital I/O</b>	-	-	-	-	
	<b>Storage Interface</b>	<b>SATA HDD</b>	2x 2.5 HDD/SSD	2x 2.5 HDD/SSD	2x 2.5 HDD/SSD	2x 2.5 HDD/SSD
		<b>mSATA</b>	2	2	2	2
		<b>M.2 (M-key)</b>	1(Gen4 x4)	1(Gen4 x4)	1(Gen3 x4)	1(Gen3 x4)
		<b>Mini PCI-E</b>	3	3	4 (mux with mSATA)	25 (mux with mSATA)
<b>Expansion</b>	<b>M.2 (B-key/ E-Key)</b>	1x M.2 B-key 1x M.2 E-key	1x M.2 B-key 1x M.2 E-key	-	-	
	<b>SIM</b>	5	5	2	2	
	<b>MezIO®</b>	-	-	-	-	
<b>Power Supply</b>	<b>PCI/PCI Express</b>	1x PCIe with NVIDIA® L4 pre-installed	-	1x PCIe with NVIDIA® L4 pre-installed	-	
	<b>DC Input</b>	8V to 48V DC input via M12 L-coded (SEMIL-2047GC) 9V to 36V DC input M12 L-coded (SEMIL-2247GC)	8V to 48V DC input via M12 L-coded (SEMIL-2007) 9V to 36V DC input M12 L-coded (SEMIL-2207)	8V to 48V DC input via M12 S-coded	8V to 48V DC input via M12 S-coded	
<b>Environmental</b>	<b>Ignition Control</b>	Built-in	Built-in	Built-in	Built-in	
	<b>Operating Temperature</b>	<b>with 35W CPU</b> -40°C to 70°C <b>with &gt;= 65W CPU</b> -40°C to 70°C (configured as 35W TDP mode) -40°C to 60°C (configured as 65W TDP mode)	<b>with 35W CPU</b> -40°C to 70°C <b>with &gt;= 65W CPU</b> -40°C to 70°C (configured as 35W TDP mode) -40°C to 60°C (configured as 65W TDP mode)	<b>with 35W CPU</b> -25°C to 70°C <b>with &gt;= 65W CPU</b> -25°C to 70°C (configured as 35W TDP mode) -25°C to 50°C (configured as 65W TDP mode)	<b>with 35W CPU</b> -40°C to 70°C <b>with &gt;= 65W CPU</b> -40°C to 70°C (configured as 35W TDP mode) -40°C to 50°C (configured as 65W TDP mode)	
<b>Certification</b>	CE/ FCC, MIL-STD-810H, MIL-STD-461G, MIL-STD-1275D (SEMIL-2247GC)	CE/ FCC, MIL-STD-810H, MIL-STD-461G, MIL-STD-1275D (SEMIL-2207)	EN 50155, CE/ FCC, MIL-STD-810G	EN 50155, CE/ FCC, MIL-STD-810G		

Model Name	Nuvo-9650AWP	POC-465AWP	NRU-230V-AWP/ NRU-240S-AWP	NRU-161V-AWP/ NRU-162S-AWP	NRU-171V-PPC/ NRU-172S-PPC		
<b>Chassis</b>	<b>Dimensions (W x D x H)</b>	225 x 286 x 90 mm	106 x 160 x 79 mm	225 x 195 x 89 mm	225 x 136 x 55 mm	257 x 65 x 176 mm	
	<b>Weight</b>	5.25 kg	1.45 kg	4.4 kg	3.0 kg	3.8 kg	
	<b>Chassis Construction</b>	Aluminum alloy with stainless steel	Aluminum alloy with stainless steel	Aluminum alloy with stainless steel	Aluminum alloy with stainless steel	Aluminum alloy with stainless steel	
	<b>IP Rating</b>	IP66	IP66	IP66	IP66	IP66	
<b>System</b>	<b>Processor</b>	Intel® 14th-Gen Core™ CPU Intel® 13th-Gen Core™ CPU Intel® 12th-Gen Core™, Pentium®, Celeron® CPU	Intel® Atom® x6425E	NVIDIA® Jetson AGX Orin™	NVIDIA® Jetson Orin™ NX/ NVIDIA® Jetson Orin™ Nano	NVIDIA® Jetson Orin™ NX/ NVIDIA® Jetson Orin™ Nano	
	<b>Acceleration GPU</b>	-	-	-	-	-	
	<b>Chipset</b>	Intel® H610E	-	-	Intel® C246	-	
	<b>Graphics</b>	Intel® UHD Graphics 770/ 730	Intel® UHD Graphics	-	Intel® UHD Graphics 630	-	
<b>I/O Interface</b>	<b>Memory</b>	Up to 96 GB DDR5 4800	Up to 32GB DDR4-3200	32GB/ 64GB LPDDR5 @ 3200 MHz	16GB/ 8GB LPDDR5 @ 3200 MHz 8GB/ 4GB LPDDR5 @ 2133 MHz	16GB/ 8GB LPDDR5 @ 3200 MHz 8GB/ 4GB LPDDR5 @ 2133 MHz	
	<b>Size</b>	-	-	-	-	10.1" screen, AG (Anti-Glare) and AF (Anti-Fingerprint)	
	<b>Touch</b>	-	-	-	-	Single-finger touch functionality when the screen is wet	
	<b>PoE/ GMSL/ GMSL2</b>	1x GbE by Intel® I219-LM (M12 X-coded) 3x 2.5GbE by Intel® I226-IT (M12 X-coded)	2x 2.5GbE by Intel® I226-IT (M12 X-coded)	4x GbE IEEE 802.3at (25.5W) GbE PoE+ ports 8x GMSL2 ports (NRU-230V-AWP only)	1x GbE Etherne via M12 X-coded 6x waterproof GMSL2 (NRU-161V-PPC) 4x GbE by Intel® I350-AM4 via M12 X-coded (NRU-162S-PPC)	1x GbE Etherne via M12 X-coded 6x waterproof GMSL2 (NRU-171V-PPC) 4x GbE by Intel® I350-AM4 via M12 X-coded (NRU-172S-PPC)	
	<b>10GbE Port</b>	-	-	1x 10GBASE-T via M12 X-coded	-	-	
	<b>CAN bus</b>	-	-	2x isolated CAN 2.0 port and 1x isolated DI via M12 A-coded	1x CAN FD port via M12 A-coded	1x CAN FD port via M12 A-coded	
	<b>Video Port</b>	1x VGA 1x DisplayPort in Type-C 1x reserved DisplayPort	1x VGA via M12	1x DisplayPort via USB Type C	1x VGA (M12 A-coded)	-	
	<b>Serial Port</b>	1x isolated RS-232/422/485, 1x isolated RS-422/485 via M12 A-coded	1x isolated RS-232 via M12, 1x isolated RS-422/485 via M12	1x isolated RS-485, 1x isolated RS-232 and 1x isolated DO via M12 A-coded	1x RS-232 port via M12 A-coded	1x RS-232 port via M12 A-coded	
	<b>USB 2.0</b>	3	2 via M12 A-coded	2 via M12 A-coded	2 via M12 A-coded	2 via M12 A-coded	
	<b>USB 3.2/ USB 3.1</b>	2	-	1x waterproof USB Type C	1x waterproof USB Type C	1x waterproof USB Type C	
	<b>Audio</b>	-	-	-	-	-	
	<b>Digital I/O</b>	-	-	1x isolated DI via M12 A-coded 1x isolated DO via M12 A-coded	1x isolated GPS PPS input via M12 A-coded	1x isolated GPS PPS input via M12 A-coded	
	<b>Storage Interface</b>	<b>SATA HDD</b>	2x internal SATA port for 2.5" HDD/SSD	-	2x 2.5" SSD	-	-
		<b>mSATA</b>	-	-	-	-	-
<b>M.2 (M-key)</b>		1(Gen4 x4)	1	1	1	1	
<b>Mini PCI-E</b>		2	1	2	1	1	
<b>Expansion</b>	<b>M.2 (B-key/ E-Key)</b>	1x M.2 B-key	-	1x M.2 B-key	1x M.2 B-key	1x M.2 B-key	
	<b>SIM</b>	2	1	3	2	2	
	<b>MezIO®</b>	-	-	-	-	-	
<b>Power Supply</b>	<b>PCI/PCI Express</b>	-	-	-	-	-	
	<b>DC Input</b>	8V to 48V DC (Nuvo-9650AWP: M12 A-code / Nuvo-9650AWP-PoE: M12 L-coded)	8V to 35V DC input via M12 A-coded	8V to 48V DC via M12 L-coded	8V to 35V DC via M12 A-coded	8V to 35V DC via M12 A-coded	
<b>Environmental</b>	<b>Ignition Control</b>	Built-in	Built-in	Built-in	Built-in	Built-in	
	<b>Operating Temperature</b>	<b>with 35W CPU</b> -25°C to 70°C <b>with &gt;= 65W CPU</b> -25°C to 70°C (configured as 35W TDP mode) -25°C to 50°C (configured as 65W TDP mode)	-25°C to 70°C	-25°C to 70°C (30W TDP mode, without 10GbE) -25°C to 60°C (30W TDP mode)	-25°C to 70°C (MAXN TDP mode)	-25°C to 60°C (MAXN TDP mode)	
<b>Certification</b>	CE/ FCC	CE/ FCC	CE/ FCC	CE/ FCC, EN 50121-3 (NRU 162S AWP only)	CE/ FCC, EN 50121-3 (NRU 172S PPC only)		